

11/14/00



Jc839 U.S. PTO
Sir:

11-15-00

A

PATENT APPLICATION

Case Docket No. 200-0318

Date: November 14, 2000

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D. C. 20231



Transmitted herewith for filing is the patent application of Inventor(s):

Stephen Kotre; Mary Breida; Joanne Woestman; Deepa Ramaswamy

For: **ENGINE ON IDLE ARBITRATION FOR A HYBRID ELECTRIC VEHICLE**

Enclosed are:

- ☒ 2 sheet(s) of drawings
- ☒ Assignment and Cover Sheet
- ☒ Information Disclosure Statement, PTO Form 1449, and Copies of Citations
- ☐ A certified copy of

The filing fee has been calculated as shown below for OTHER THAN A SMALL ENTITY:

FOR	NO. FILED	NO. EXTRA	RATE	FEE
Basic Fee				\$ 710
Total Claims	16	0	18	\$ 0
Indep Claims	3	0	80	\$ 0
Multiple Dependent Claims(s)	0		270	\$ 0
Presented				
			TOTAL	\$ 710

- [X] Please charge Deposit Account No. 06-1510 in the amount shown next to the Total.
A duplicate copy of this sheet is enclosed.
- [X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-1510. If there are insufficient funds in this account, please charge the fees to Deposit Account No. 06-1505. A duplicate copy of this sheet is enclosed.
Any additional filing fees required under 37 CFR 1.16.
Any patent application processing fees under 37 CFR 1.17.
- [X] The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-1510. If there are insufficient funds in this account, please charge the fees to Deposit Account No. 06-1505.
Any patent application processing fees under 37 CFR 1.17.
Any filing fees under 37 CFR 1.16 for presentation of extra claims.

"Express Mail"
Mailing Label Number

EL557482096US

Date of Deposit

11-14-00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patent and Trademarks, Washington, D.C. 20231

Lizbeth Lemus
(Printed Name of Person Mailing Paper or Fee)

Lizbeth Lemus
(Signature of Person Mailing Paper or Fee.)

Karl A. Vick

Karl A. Vick
Attorney or Agent of Record
Registration No. 33,288
Ford Global Technologies, Inc.
One Parklane Blvd.,
600 Parklane Towers East
Dearborn, MI 48126

ENGINE ON IDLE ARBITRATION FOR A HYBRID ELECTRIC VEHICLE

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates generally to a Hybrid Electric Vehicle (HEV), and specifically a method and system for an HEV to determine when the engine should operate during vehicle idle and under what parameters.

10

Discussion of the Prior Art

15

20

25

The need to reduce fossil fuel consumption and emissions in automobiles and other vehicles powered by Internal Combustion Engines (ICEs) is well known. Vehicles powered by electric motors attempt to address these needs. Unfortunately, electric vehicles have limited range and power capabilities. Further, electric vehicles need substantial time to recharge their batteries. An alternative solution is to combine a smaller ICE with electric motors into one vehicle. Such vehicles are typically called Hybrid Electric Vehicles (HEVs). See generally, U.S. Pat. No. 5,343,970 (Severinsky).

The HEV is described in a variety of configurations. Many HEV patents disclose systems where an operator is required to select between electric and internal combustion

operation. In other configurations, the electric motor drives one set of wheels and the ICE drives a different set.

Other, more useful, configurations have developed. For example, a Series Hybrid Electric Vehicle (SHEV) configuration is a vehicle with an engine (most typically an ICE) connected to an electric motor called a generator. The generator, in turn, provides electricity to a battery and another motor, called a traction motor. In the SHEV, the traction motor is the sole source of wheel torque. There is no mechanical connection between the engine and the drive wheels. A Parallel Hybrid Electrical Vehicle (PHEV) configuration has an engine (most typically an ICE) and an electric motor that together provide the necessary wheel torque to drive the vehicle. Additionally, in the PHEV configuration, the motor can be used as a generator to charge the battery from the power produced by the ICE.

A Parallel/Series Hybrid Electric Vehicle (PSHEV) has characteristics of both PHEV and SHEV configurations and is typically known as a "powersplit" configuration. In the PSHEV, the ICE is mechanically coupled to two electric motors in a planetary gear-set transaxle. A first electric motor, the generator, is connected to a sun gear. The ICE is connected to a carrier. A second electric motor, a traction motor, is connected to a ring (output) gear via additional gearing in a transaxle. Engine torque powers the generator to

charge the battery. The generator can also contribute to the necessary wheel (output shaft) torque. The traction motor is used to contribute wheel torque and to recover braking energy to charge the battery if a regenerative braking system is used. In this configuration, the generator can selectively provide a reaction torque that may be used to control engine speed. In fact, the engine, generator motor and traction motor can provide a continuous variable transmission (CVT) effect. Further, the HEV presents an opportunity to better control engine idle speed over conventional vehicles by using the generator to control engine speed.

The desirability of combining an ICE with electric motors is clear. There is great potential for reducing vehicle fuel consumption and emissions with no appreciable loss of vehicle performance or drive-ability. Nevertheless, new ways must be developed to optimize the HEV's potential benefits.

One such area of development is HEV engine operation. In an HEV, the engine has multiple functions. The engine's first and most obvious purpose is to provide wheel torque. The engine also is necessary for many secondary functions. While the engine is running the HEV can also: spin the generator to charge a battery, purge a fuel vapor canister, mature its adaptive fuel tables, operate its air-conditioning (A/C) system, replenish vacuum to the A/C and brake systems, and maintain optimal engine and catalyst temperatures. Each of

these secondary functions has separate optimal engine
operating conditions and no one idle speed is optimal for
each. Therefore, if the engine is operating at optimal speed
for one secondary function, while other functions are
5 possible, they may not be completed as efficiently or quickly.

The HEV engine has many functions that require it to be
running. Nevertheless, the main goals of HEVs are reduction
of fuel usage, emissions, and increasing run time (i.e., the
length of time the vehicle can operate without refueling or
10 recharging). The HEV can achieve these goals by turning the
engine off when it is not needed. Fortunately, the secondary
HEV engine functions do not require the engine to run all the
time. The battery and traction motor are capable of providing
sufficient driving torque for many driving conditions.

15 Engine usage parameters, and specifically, engine run
time, are divided into two categories including drive
conditions, where wheel torque is supplied, and idle
conditions. Idle conditions exist when the vehicle is not
moving. Generally, it is desirable to turn the engine off
20 during idle conditions. Nevertheless, the secondary functions
may still require a running engine. The prior art has not
addressed the problem of determining when the engine should
run during idle conditions and what parameters optimize the
performance of the desired secondary function.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide a method and system to determine when the engine should operate during vehicle idle and under what parameters for a hybrid electric vehicle (HEV). The present invention provides a method and system to implement a logic arbitration scheme allowing a Vehicle System Controller (VSC) to determine if the engine should run during idle conditions and, if so, at what operating parameters.

The method and system to determine engine operation during idle comprises determining if idle conditions are met, determining if engine operation is necessary, determining a method of engine control, and operating the engine at the most efficient operating parameters. Vehicle speed establishes whether idle conditions exist or whether the vehicle is in motion. Accelerator position is established to determine torque requests. The method and system also determine when engine operation is necessary. A controller determines whether the battery needs charging, whether vacuum needs replenishing in the climate control system or brake system reservoir, whether a vapor canister requires purging, whether the Adaptive Fuel Tables require fast adapting, whether the engine or catalyst temperatures are unacceptably low, and if air conditioning has been requested. If any determinations

are positive, the controller turns (sets to 1) the appropriate "engine on" idle flag for that function and proceeds to determine the appropriate engine control mode.

To determine the appropriate method of engine control, the controller determines whether the battery state of charge is too high or whether generator failure exists. If the state of charge is not too high and generator failure does not exist, the engine is run in torque control mode through a generator controller. Otherwise, the engine is run in speed control mode through powertrain controllers. If the engine is operated in speed control mode, typical engine control is employed through the use of spark and air feedback. However, if torque control mode is employed, the vehicle is run at optimum conditions by the generator controller for the desired function.

The system for determining whether the engine should run during idle comprises many vehicle components including an engine, a vehicle system controller, battery, battery state of charge determination system, climate control system requests, brake control system, climate system and brake system reservoir vacuum determination, a vapor canister, vapor canister purging need determination, adaptive fuel tables, adaptive fuel tables mature determination, engine and catalyst temperature determination, an air conditioning system, a generator, a means to control HEV components including a

generator controller, a powertrain controller and a battery controller.

Other objects of the present invention will become more apparent to persons having ordinary skill in the art to which the present invention pertains from the following description taken in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE FIGURES

The foregoing objects, advantages, and features, as well as other objects and advantages, will become apparent with reference to the description and figures below, in which like numerals represent like elements and in which:

Fig. 1 illustrates a general hybrid electric vehicle (HEV) configuration.

Fig. 2 illustrates a logic flow diagram for controlling engine idle speed according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention relates to Hybrid Electric Vehicles (HEVs). Figure 1 demonstrates just one possible configuration, specifically a Parallel/Series Hybrid Electric Vehicle (powersplit) configuration.

In a basic HEV, a Planetary Gear Set 20 mechanically couples a Carrier Gear 22 to an Engine 24 via a One Way Clutch

26. The Planetary Gear Set 20 also mechanically couples a Sun Gear 28 to a Generator Motor 30 and a Ring (output) Gear 32. The Generator Motor 30 also mechanically links to a Generator Brake 34 and is electrically linked to a Battery 36. A
5 Traction Motor 38 is mechanically coupled to the Ring Gear 32 of the Planetary Gear Set 20 via a Second Gear Set 40 and is electrically linked to the Battery 36. The Ring Gear 32 of the Planetary Gear Set 20 and the Traction Motor 38 is mechanically coupled to Drive Wheels 42 via an Output Shaft
10 44.

The Planetary Gear Set 20, splits the Engine 24 output energy into a series path from the Engine 24 to the Generator Motor 30 and a parallel path from the Engine 24 to the Drive
15 Wheels 42. Engine 24 speed can be controlled by varying a split to the series path while maintaining a mechanical connection through the parallel path. The Traction Motor 38 augments the Engine 24 power to the Drive Wheels 42 on the parallel path through the Second Gear Set 40. The Traction
20 Motor 38 also provides the opportunity to use energy directly from the series path, essentially running off power created by the Generator Motor 30, thereby reducing losses associated with converting energy into and out of chemical energy in the Battery 36.

A Vehicle System Controller (VSC) 46 controls many
25 components in this HEV configuration by connecting to each

component's controller. The VSC 46 connects to the Engine 24 via a hardwire interface and Engine Control Unit (ECU) 48. The ECU 48 and the VSC 46 can be based in the same unit, but are actually separate controllers. The VSC 46 also connects to a Battery Control Unit (BCU) 50, and a Transaxle Management Unit (TMU) 52 through a communication network such as a Controller Area Network (CAN) 54. The BCU 50 connects to the Battery 36 via the hardwire interface. The TMU 52 controls the Generator Motor 30 and Traction Motor 38 via the hardwire interface.

Desired HEV efficiency and optimization goals require optimal control of the Engine 24. The present invention provides a method and system to determine if the Engine 24 should be running and, if so, at what operating conditions.

Figure 2 illustrates an engine Idle Speed Control Strategy 100 that is utilized by VSC 46. First, in Step 110, a determination is made as to whether vehicle idle entry conditions are met. To be in vehicle idle entry conditions, the vehicle speed ("VSPD") must be below a predetermined minimum value ("VSPD_IDLE") and accelerator position ("PPS_REL") must be below a minimum level ("PPS_MIN_IDLE"). If the vehicle idle entry conditions are not met, the vehicle will remain in the current drive mode as in Step 120, otherwise proceed to Step 130.

In Step 130, a determination is made as to whether battery state of charge ("BATT_SOC") is too low. This is accomplished by either determining whether BATT_SOC is lower than a predetermined minimum value (SOC_MIN_LVL) on the first pass or whether BATT_SOC is below a predetermined level that factors in hysteresis (SOC_MIN_HYS) on any subsequent pass. If the BATT_SOC is too low, proceed to Step 140, otherwise proceed to Step 150.

In Step 140, the Engine 24 is kept on at idle speed until the state of charge of the Battery 36 is acceptable. This is referred to as ENG_ON_IDLE_SOC = 1 mode. While the Engine 24 is in ENG_ON_IDLE_SOC = 1 mode, a vacuum reservoir (not shown) can be replenished as per the amount of vacuum available from the amount of engine brake torque requested. Also, conventional purge and adaptive fuel strategies may run in normal modes. Further, if the vehicle operator requests air conditioning, the amount of engine brake torque required may be modified to accommodate this slight state of charge change. Finally, the Engine 24 and inferred (or measured) catalyst (not shown) temperatures will be increased or maintained naturally, as the system requires. The logic then proceeds to Step 280.

In Step 150, a determination is made as to whether the vacuum needs to be replenished in a climate control system (not shown) and brake system's reservoir (not shown). This is

accomplished by determining whether the reservoir vacuum (RESERVOIR_VAC) is below a predetermined minimum level (RESVAC_MIN_LVL) on the first pass or whether RESERVOIR_VAC is below a predetermined level that factors in hysteresis (RESVAC_MIN_HYS) on any subsequent pass. If the vacuum needs replenishing, proceed to Step 160, otherwise proceed to Step 170.

In Step 160, the Engine 24 is kept on at idle speed until the vacuum level reaches an acceptable level (ENG_ON_IDLE_VAC = 1). This is accomplished by scheduling a desired engine brake torque that will produce enough vacuum to replenish the reservoir quickly. At the same time, the Battery 36 can be charged at a rate dictated by the amount of engine brake torque requested. Further, the conventional purge and adaptive fuel strategies may be run in normal modes. If air conditioning is requested by the vehicle operator, the amount of engine brake torque may be modified slightly to compensate for a slight vacuum change. Finally, Engine 24 and catalyst temperatures may be increased or maintained naturally, as the system requires. The logic then proceeds to Step 280.

In Step 170, a determination is made as to whether a vapor canister (not shown) requires HEV-fast purging. To determine this, one of three inquiries is made by the VSC 46. The VSC 46 may determine whether a fuel tank pressure (TPR_ENG) is above a predetermined maximum level

(TNK_PRS_LVL). Alternatively, the VSC 46 may determine whether the time since the last purge has been too long (TSLP>TIME_TO_FORCE_PURGE). Also, the VSC 46 may determine whether the vapor canister is already purging (PG_DC>0) and whether the Engine 24 is on at idle speed until the purge is completed (ENG_ON_IDLE_PRG = 1). If the answer to any of these scenarios is no, proceed to Step 190, otherwise proceed to Step 180.

In Step 180, the Engine 24 is kept on at idle speed until the purging of the vapor canister is completed, where ENG_ON_IDLE_PRG = 1. This is accomplished by scheduling a desired brake torque that will produce vacuum so that an aggressive purge rate can be employed to clean the vapor canister as quickly as possible. At the same time, the Battery 36 can be recharged at a rate dictated by the amount of engine brake torque scheduled. Also, the vacuum reservoir can be replenished per the amount of vacuum available from the amount of brake torque scheduled. If the vehicle operator requests air conditioning, minor adjustments may be made to the amount of brake torque scheduled to accommodate this request. Finally, the Engine 24 and catalyst temperatures will be increased or maintained naturally. Once vapor purge is completed, proceed to Step 280.

In Step 190, a determination is made as to whether an adaptive fuel table requires HEV-fast adapting (ADP_KAM_MATURE

= 0). This occurs when the VSC 46 has not learned the fuel system shifts (which are written to a table and "keep-alive memory") for this particular drive cycle. If the adaptive fuel table requires HEV-Fast adapting, proceed to Step 200, otherwise proceed to Step 210.

In Step 200, the Engine 24 is kept on at idle speed until the fuel adapting is completed (ENG_ON_IDLE_ADP = 1). This is accomplished by scheduling the desired engine brake torque that will produce the engine airflow that is needed to learn fuel shifts. Preferably, this is accomplished by a slow sweep of brake torque to cover the range of airflows. At the same time, the Battery 36 can be charged at a rate dictated by the amount of engine brake torque requested. Further, the vacuum reservoir can be replenished per the amount of vacuum available from the amount of engine brake torque requested. If air conditioning (not shown) is requested, the amount of engine torque requested will be modified slightly to accommodate the request. Finally, the Engine 24 and catalyst temperatures will be increased or maintained naturally. The logic then proceeds to Step 280.

Next, in Step 210, a determination is made as to whether the Engine 24 or catalyst has cooled to unacceptable levels. A two step analysis is undertaken to determine this. First, with respect to the Engine 24, a determination is made on the first pass whether the Engine 24 is too cool to provide cabin

heat (ECT<HEV_ECT_STABLE) or whether ECT is below a predetermined level that factors in hysteresis (ECT_STABLE_HYS) on any subsequent pass. If the Engine 24 has cooled down below a predetermined acceptable level, proceed to step 220. If the Engine 24 has not cooled below the predetermined acceptable level, the catalyst is checked to see if it has cooled to unacceptable performance levels on the first pass (EXT_CMD < CATS_LITOFF) or whether EXT_CMD is below a predetermined level that factors in hysteresis (CATS_LITOFF_HYS) on any subsequent pass. If the catalysts have cooled below a predetermined acceptable level, proceed to Step 220, otherwise proceed to Step 230.

In Step 220, the Engine 24 is kept on at idle speed until the ECT and catalyst temperatures reach an acceptable level (ENG_ON_IDLE_HEAT = 1). This is accomplished by scheduling a desired engine brake torque that will minimize fuel consumption while providing heat to the Engine 24 and catalyst quickly. At the same time, the Battery 36 can be charged at a rate dictated by the amount of engine brake torque requested. Further, the vacuum reservoir can be replenished per the amount of vacuum available from the amount of engine brake torque requested. If air conditioning is requested, the amount of engine torque requested will be modified slightly to accommodate the request. Finally, the engine and catalyst temperatures will be increased or maintained naturally. The

logic then proceeds to Step 280.

Next in Step 230, a determination is made as to whether air conditioning has been requested from an instrument panel switch (not shown) (ACRQST = 1). If it has, proceed to Step 240, otherwise proceed to Step 250.

In Step 240, the Engine 24 is kept on at idle speed until an air conditioning panel is switched off (ENG_ON_IDLE_AC = 1). To accomplish this, the desired engine torque is scheduled that will minimize fuel consumption while accommodating this request. At the same time, the Battery 36 can be charged at a rate dictated by the amount of engine brake torque requested. Further, the vacuum reservoir can be replenished per the amount of vacuum available from the amount of engine brake torque requested. Further, conventional purge and adaptive fuel strategies can be run in normal modes. Finally, the engine and catalyst temperatures will be increased or maintained naturally. The logic then proceeds to Step 280.

In Step 250, a determination is made as to whether the Engine 24 has been on at vehicle idle condition for a minimum amount of time (ENG_IDLE_ON_TMR > ENG_IDLE_ON_MIN). This is done to prevent too much engine on/off cycling at vehicle idle. If the Engine 24 has not been on for the minimum time, Step 260 dictates that the vehicle remain in the current idle mode. If the Engine 24 has been on for the minimum time, Step

270 directs that the Engine 24 is turned off (HEV_ENG_MODE = 0). This can occur, for example, when a vehicle has been stopped at a stop light for a predetermined minimum amount of time. From either Step 260 or 270, the logic proceeds back to
5 Step 110.

In Step 280, a determination is made as to whether the battery SOC is above a predetermined maximum level or whether there is generator failure. First, with respect to the battery SOC, a determination is made on the first pass to determine if
10 the battery SOC is too high (BATT_SOC > SOC_MAX_LVL) or whether the battery SOC is above a predetermined level that factors in hysteresis (BATT_SOC > SOC_MAX_HYS) on any subsequent pass. If yes, proceed to Step 300. If no, determine whether the Generator Motor 30 has failed. If it
15 has not, proceed to Step 290, otherwise proceed to Step 300.

In Step 290, a primary engine idle mode is activated for vehicle idle conditions (HEV_ENG_MODE = 2). In this mode, the vehicle system VSC 46 controls the Generator Motor 30 rotational speed, which in turn controls the Engine 24 idle
20 speed.

In Step 300, the secondary engine idle mode is activated for vehicle idle conditions (HEV_ENG_MODE = 1). In this mode, the Generator Motor 30 is shut off, and the Vehicle System Controller 46 controls the engine idle speed via conventional
25 control of fuel, airflow, and ignition timing. After Steps

290 or 300, the logic proceeds back to Step 110.

The above invention provides a dual method for controlling Engine 24 idle speed in an HEV to accommodate any possible HEV idle situation. The invention uses the Generator Motor 30 coupled to the VSC 46 to control Engine 24 speed for most of the "engine-on" idle modes. In alternative situations, such as high battery state of charge or generator failure, the VSC 46 passes control of engine idle speed to the Engine Control Unit 48. The invention results in perceived tighter speed control feel by having fewer perturbations in Engine 24 speed.

This Engine Idle Speed Control Strategy 100 illustrated in Figure 2 must be consistent with an Engine "ON" Idle Arbitration Logic that is the subject of the present invention. Basically, the Arbitration Logic proposed for the Engine Idle Speed Control Strategy 100 utilizes Engine "ON" scenarios. These scenarios are developed to identify situations when the Engine 24 should be running.

If the engine runs in speed control mode (HEV_ENG_MODE=1), the engine will control its own "idle" speed by conventional means (feedback spark and air control) and the generator is commanded to deliver zero torque. In this mode the vacuum reservoir can be replenished (per the amount of vacuum available from the engine idle speed), conventional purge and adaptive fuel strategies can run, engine and

catalyst temperature will be increased/maintained naturally, and if the A/C is requested, the amount of torque required is already compensated via a conventional A/C airflow idler.

If the Engine 24 is run in torque mode (HEV_ENG_MODE=2), the desired engine brake torque is scheduled depending on which "engine on idle requestor" is on. In this mode the generator motor controls engine speed, allowing the engine to run at optimum level for the necessary function. Depending on which flag is set, the following Engine 24 operating conditions exist:

If ENG_ON_IDLE_SOC=1, a desired Engine 24 brake torque that will produce the desired Battery 36 charging rate is scheduled. At the same time, the vacuum reservoir can be replenished (per the amount of vacuum available from the amount of engine brake torque requested to charge the battery); conventional purge and adaptive fuel strategies can run like normal; if A/C is requested, the amount of torque required is already compensated for; and, engine and catalyst temperatures are increased/maintained naturally.

If ENG_ON_IDLE_VAC=1, then a desired engine brake torque (i.e., small) is scheduled that will produce enough vacuum to replenish the reservoir quickly. At the same time, the battery can be charged (at a rate dictated by amount of engine brake torque requested to replenish the vacuum); conventional purge and adaptive fuel strategies can run like normal; if A/C

is requested, the amount of torque required is already compensated for; and, engine and catalyst temperatures are increased/maintained naturally.

If ENG_ON_IDLE_PRG=1, a desired engine brake torque (i.e., small) that will produce vacuum so that an aggressive purge rate can be employed to clean the vapor canister as quickly as possible is scheduled. At the same time, the battery can be charged (at a rate dictated by amount of engine brake torque requested to purge); the vacuum reservoir can be replenished (per the amount of vacuum available from the amount of engine brake torque requested to purge); if A/C is requested, the amount of torque required is already compensated for; and, engine and catalyst temperatures are increased/maintained naturally.

If ENG_ON_IDLE_ADP=1, a desired engine brake torque that will produce Engine 24 airflows that are needed to learn the fuel shifts is scheduled. (This could be a slow sweep of torque to cover a range of airflows.) At the same time, the battery can be charged (at a rate dictated by amount of engine brake torque requested to learn the fuel shifts); the vacuum reservoir can be replenished (per the amount of vacuum available from the amount of engine brake torque requested to learn the fuel shifts); if A/C is requested, the amount of torque required is already compensated for; and, engine and catalyst temperatures will be increased/maintained naturally.

If ENG_ON_IDLE_HEAT=1, a desired engine brake torque that will minimize fuel consumption while producing heat to warm the engine and catalyst quickly is scheduled. At the same time, the battery can be charged (at a rate dictated by amount of engine brake torque requested to warm the engine and catalyst); the vacuum reservoir can be replenished (per the amount of vacuum available from the amount of engine brake torque requested to warm the engine and catalyst); conventional purge and adaptive fuel strategies can run like normal; and, if A/C is requested, the amount of torque required is already compensated for.

If ENG_ON_IDLE_AC=1, a desired engine brake torque that will minimize fuel consumption while accommodating the request for A/C is scheduled. At the same time, the battery can be charged (at a rate dictated by amount of engine brake torque requested to run the A/C); the vacuum reservoir can be replenished (per the amount of vacuum available from the amount of engine brake torque requested to run the A/C); conventional purge and adaptive fuel strategies can run like normal; and, engine and catalyst temperatures are increased/maintained naturally.

Note the function whose flag is first turned on gets priority over all other functions in determining engine brake torque conditions. If a different priority is desired, the logic order can change, placing the desired high priority

function first and the desired low priority function last in the logic chain.

It is understood that the invention is not limited by the exact construction or method illustrated and described above, 5 but that various changes and/or modifications may be made without departing from the spirit and/or the scope of the inventions.

CLAIMS

We claim:

1. A method for controlling idle speed of an engine within a hybrid electric vehicle including a generator having a rotor assembly which is operatively coupled to the engine, said method comprising the steps of:

determining whether a first set of vehicle idle entry conditions are met, wherein said first set of vehicle idle entry conditions comprises whether the vehicle is below a predetermined maximum idle speed and whether an accelerator is below a predetermined minimum pedal position;

scheduling a desired engine brake torque and selectively activating a vehicle system controller to control said generator and producing a first desired effect when a first set of operating conditions is present;

selectively activating an engine controller to control engine idle speed when a second set of operating conditions is present; and

turning off the engine when said first set of conditions is not present and when the engine has been in a current vehicle idle mode for a predetermined amount of time.

2. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said

generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when a state of charge of a battery is below a predetermined battery minimum state of charge.

3. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when a vacuum level in a climate control reservoir is below a predetermined minimum climate control vacuum level.

4. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively

activating the vehicle system controller to control said generator to produce the first desired effect when a vacuum level in a brake system reservoir is below a predetermined brake system vacuum level.

5

5. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when a vapor canister contained within a fuel system requires purging.

6. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when an adaptive fuel table requires HEV-fast adaptive learning.

7. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when the engine has cooled below a predetermined engine temperature.

8. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and selectively activating the vehicle system controller to control said generator to produce the first desired effect when a catalyst has cooled below a predetermined minimum catalyst temperature.

9. The method of claim 1, wherein the step of scheduling the desired engine brake torque and selectively

activating the vehicle system controller to control said generator and producing the first desired effect when the first set of operating conditions is present comprises the step of scheduling the desired engine brake torque and
5 selectively activating the vehicle system controller to control said generator to produce the first desired effect when air conditioning has been requested by a vehicle operator.

10 10. The method of claim 1, wherein the step of selectively activating the engine controller to control engine idle speed when the second set of operating conditions is present comprises the step of selectively activating the engine controller to control engine idle speed when:

15 the generator has failed; or

a battery state of charge exceeds a maximum desired level.

20 11. A hybrid electric vehicle including a generator having a rotor assembly which is operatively coupled to an engine, the hybrid electric vehicle comprising:

25 a vehicle system controller for controlling idle speed of the engine when a first set of operating conditions is present at a scheduled engine brake torque to produce a desired result; and

an engine controller for controlling the idle speed of the engine when a second set of operating conditions is present.

5 12. The hybrid electric vehicle of claim 11, wherein
said first set of operating conditions is selected from a
group consisting of a low battery state of charge, a low
climate control vacuum level, a low brake system reservoir
vacuum level, a high fuel tank vapor pressure requiring fuel
10 vapor canister purging, a condition where the fuel vapor
canister is currently being purged, a minimum time reached
since previously purging the vapor canister, a low engine
temperature, a low catalyst temperature, an adaptive fuel
table requiring HEV-fast adaptive learning, and an activated
15 air conditioning switch.

13. The hybrid electric vehicle of claim 11, wherein
said second set of operating conditions is selected from a
group consisting of a high battery state of charge and a
20 failed generator.

14. A method for controlling idle speed of an engine
within a hybrid electric vehicle including a generator having
a rotor assembly which is operatively coupled to the engine,
25 said method comprising the steps of:

determining whether a first set of vehicle idle entry conditions are met, wherein said first set of vehicle idle entry conditions comprises whether the vehicle is below a predetermined maximum idle speed and whether an accelerator is
5 below a predetermined minimum pedal position;

scheduling a desired engine brake torque and selectively activating a vehicle system controller to control said generator and producing a first desired effect when a first set of operating conditions are: a low battery state of charge, a low climate control vacuum level, a low brake system reservoir vacuum level, a high fuel tank pressure, the existence of a minimum time period since a last vapor canister purging, the existence of current vapor canister purging, the existence of a learned adaptive fuel table for the current driving mode, a low engine temperature, a low catalyst temperature, and the state of activation of an air conditioning switch;
10
15

selectively activating an engine controller to control engine idle speed when a second set of operating conditions is
20 present;

turning off the engine when said first set of operating conditions is not present and when the engine has been in a current vehicle idle mode for a predetermined amount of time, otherwise maintaining said current vehicle idle mode.

15. The method of claim 14, wherein the step of selectively activating the engine controller to control engine idle speed when the second set of operating conditions is present comprises the step of selectively activating the engine controller to control engine idle speed when the generator has failed.

16. The method of claim 14, wherein the step of selectively activating the engine controller to control engine idle speed when the second set of operating conditions is present comprises the step of selectively activating the engine controller to control engine idle speed when a battery state of charge exceeds a maximum desired level.

ABSTRACT

This invention is a method and system for determining whether the engine should be running in a Hybrid Electric Vehicle during vehicle idle conditions. Specifically, a controller determines if the vehicle is in idle and if engine operation is necessary. To determine whether engine operation is necessary, the controller determines whether the battery needs charging, whether vacuum needs to be replaced in the climate control system or brake system reservoir, whether the vapor canister requires purging, whether the adaptive fuel tables require fast adapting, whether the engine or catalyst temperatures are unacceptable, or whether the air conditioning has been requested. Once the controller determines that the engine must be running, the controller determines in which control mode to run the engine, either speed control mode (using powertrain controllers) or torque control mode (using a generator and generator controller). Finally, the controller optimizes engine running conditions, to the extent possible depending upon the control mode, to perform any necessary functions during vehicle idle.

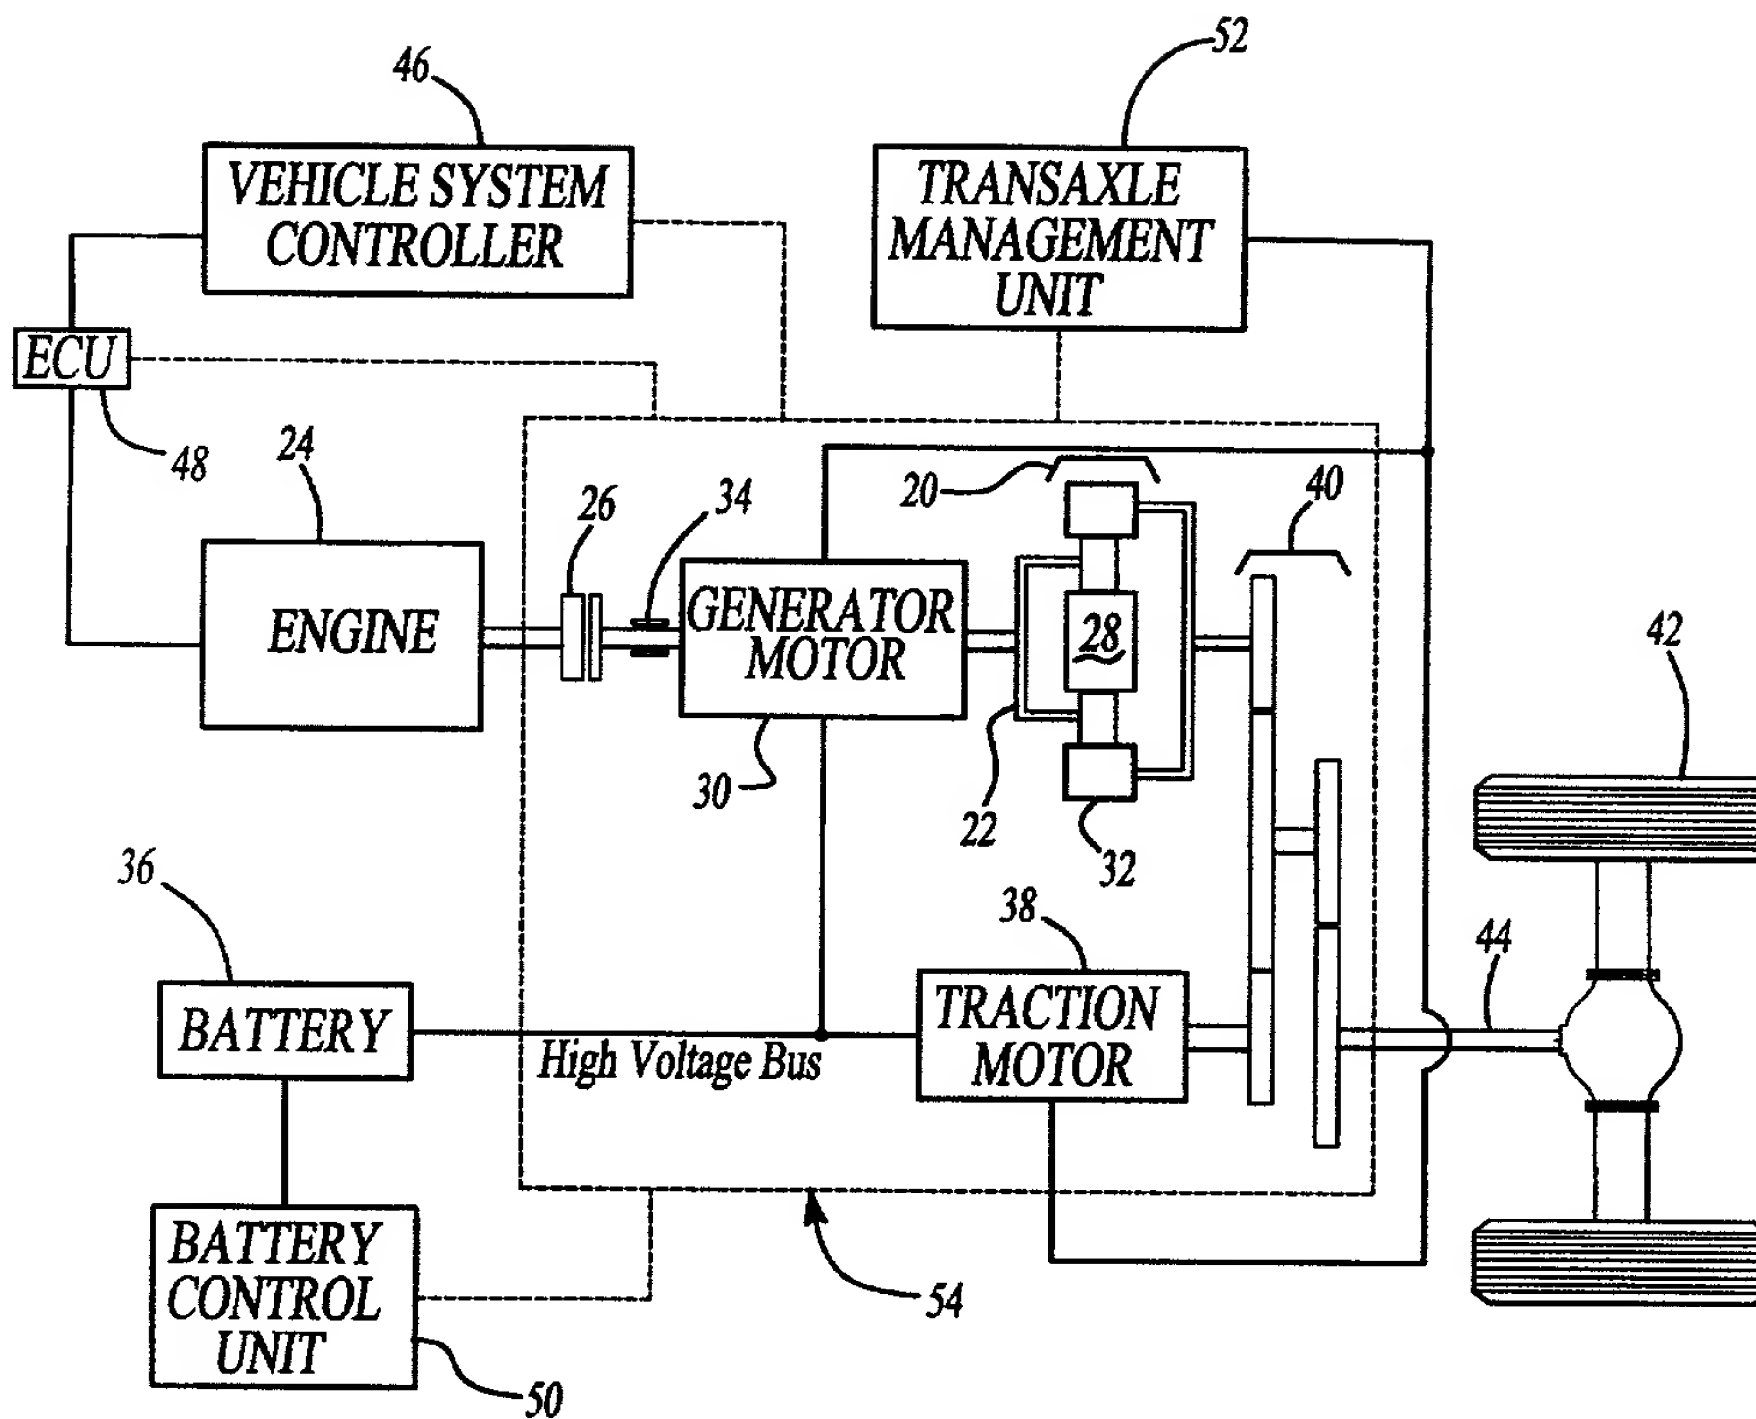
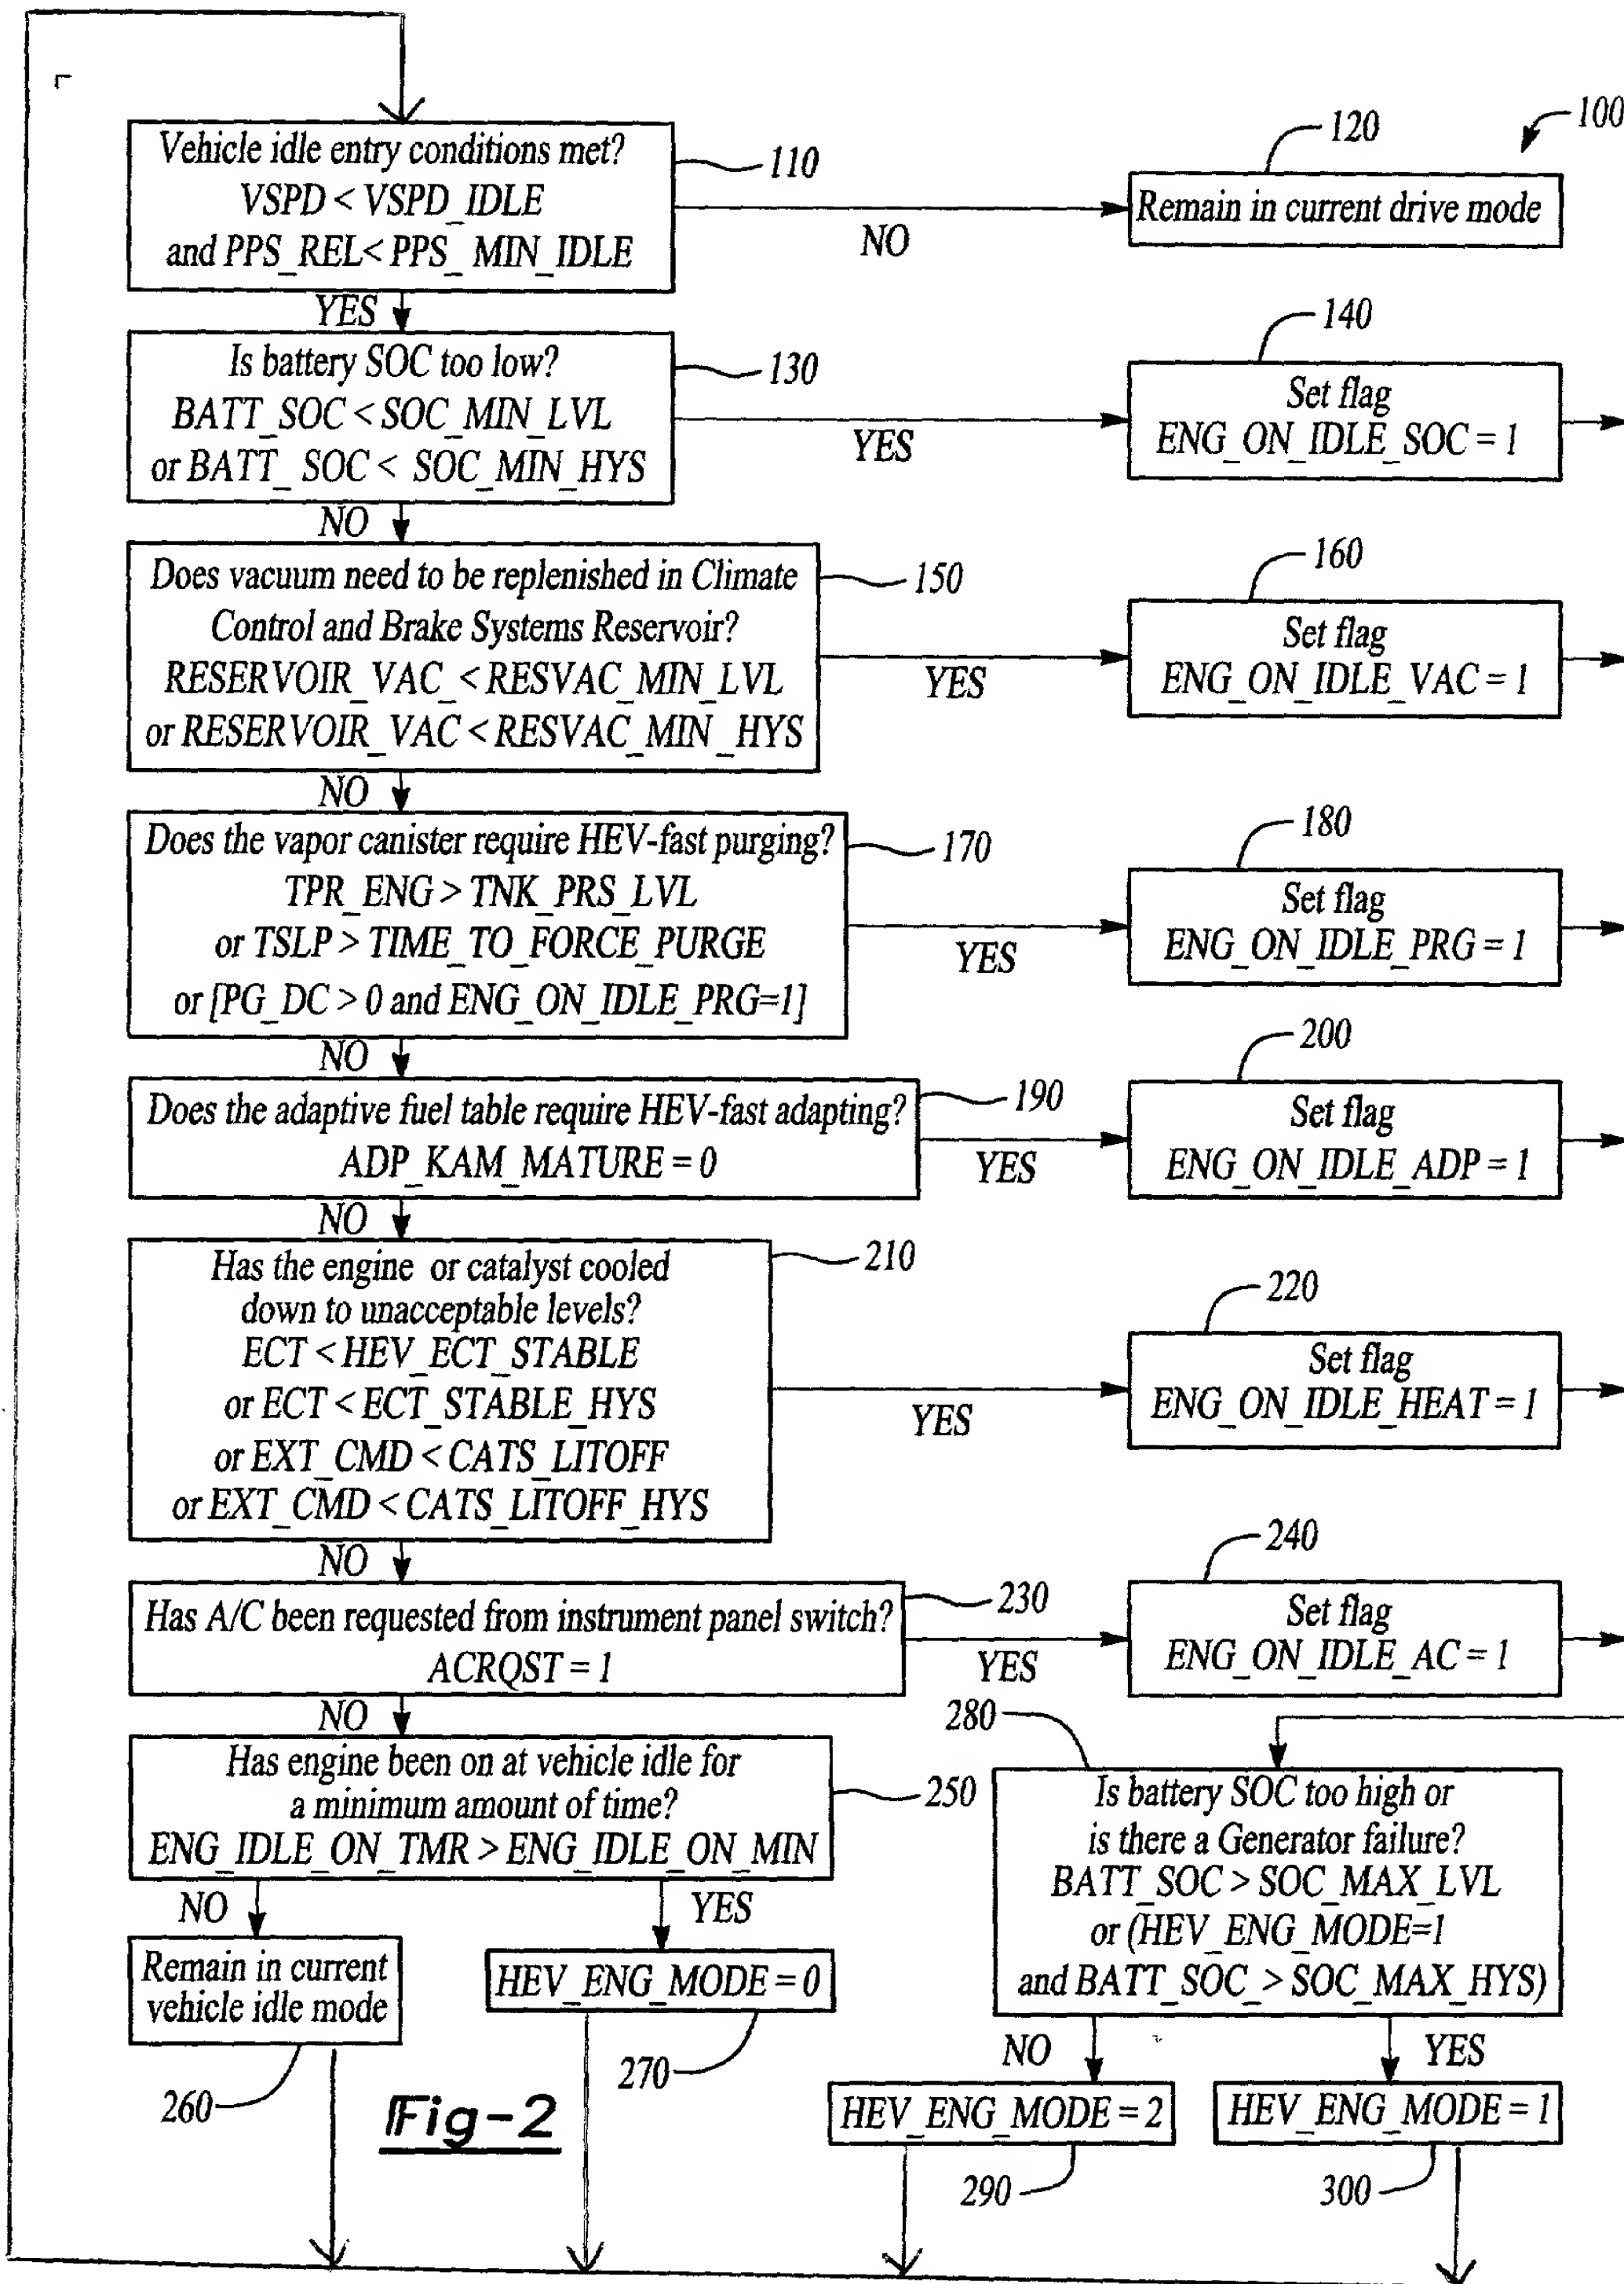


Fig-1



DECLARATION AND POWER OF ATTORNEY - ORIGINAL APPLICATION**Attorney's Docket No.**
200-0318

As a below named inventor, I hereby declare:

My residence, post office address and citizenship are as stated below next to my name;

I verily believe I am the original, first and sole inventor or an original, first and joint inventor of the subject matter that is claimed and for which a patent is sought on the invention entitled

ENGINE ON IDLE ARBITRATION FOR A HYBRID ELECTRIC VEHICLE

the specification of which is attached hereto.

I have reviewed and understand the contents of the specification identified above, including the claims.

I acknowledge my duty to disclose information of which I am aware that is material to the examination of this application in accordance with Section 1.56(a), Title 37 of the Code of Federal Regulations; and as to application for patents or inventor's certificate on the invention filed in any country foreign to the United States of America, prior to this application by me or my legal representatives or assigns,

☒ no such applications have been filed, or

☐ such applications have been filed as follows

COUNTRY	APPLICATION NO.	DATE OF FILING (month, day, year)	DATE OF ISSUE (month, day, year)	PRIORITY CLAIMED UNDER 35 USC 119

☐ I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER(S)	FILING DATE (month, day, year)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

(Application Number) (Filing Date) (Status - patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith and to act on my behalf before the competent International Authorities in connection with any and all international applications filed by me.

(List name and registration number)

John M. Naber - 44,783

Karl A. Vick - 33,288

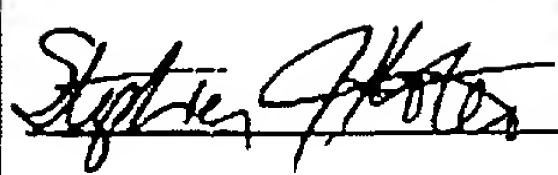

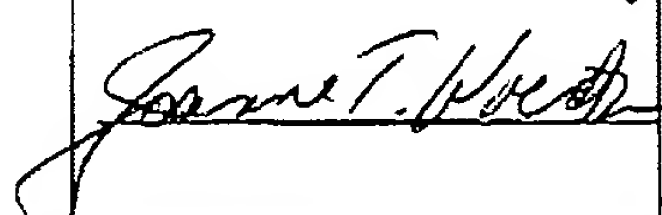

Karl A. Vick - 33,288

Roger L. May - 26,406

Address all correspondence and telephone calls to:

John M. Naber
Foster, Swift, Collins & Smith, P.C.
313 South Washington Square
Lansing, MI 48933-2193 Phone: 517-371-8100

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

NAME AND POST OFFICE ADDRESS OF INVENTOR:	RESIDENCE	CITIZENSHIP	SIGNATURE	DATE
Stephen John Kotre 2011 Anderson Ct. Ann Arbor, MI 48104 US	Ann Arbor, MI 48104 US	U.S.A		11/13/2000
Deepa Ramaswamy 6610 Whittaker Road Ypsilanti, MI 48197 US	Ypsilanti, MI 48197 US	U.S.A		11/13/2000
Joanne Theresa Woestman 22336 Olmstead St. Dearborn, MI 48124 US	Dearborn, MI 48124 US	U.S.A		11/14/2000
Mary Theresa Breida 4489 Lake Forest Drive East Ann Arbor, MI 48108 US	Ann Arbor, MI 48108 US	U.S.A		11/13/2000